

EFFECTIVE REMOVAL OF ANCIENT VINE- OR TREEYARDS

NEEDS-ORIENTED EACH WITH 1 OR 2 EJECTION ROLLERS

high performance in face of simple method of operation



CLEAN WORKING

2

EJECTION ROLLERS CARRY OUT EVEN MORE EFFECTIVELY ROOTS AND PATHOGENIC AGENTS



THE ROLLERS CAN BE TURNED INDEPENDENTLY

DESIGNED FOR HARSHTEST LONG-TERM USE

We individually manufacture the machines according to your wishes. Please feel free to contact us. Phone +49(0)6322 979 94-0 | Fax +49(0)6322 979 94-90 | E-Mail info@w-p-t.biz | www.w-p-t.biz

HYDRAULICALLY ADJUSTABLE (OPTIONALLY) SUPPORTING WHEELS AND TWIN ROLLERS




FOR UPROOTING OF

- > ancient vines
- > fruit plantations
- > hedges and shrubs
- > shortened stalks
- > broader trees

WAGNER'S SMALLEST BREAKER PLOUGH OUTSTANDING EFFICIENT AND HIGHLY PRODUCTIVE

MODEL M II WITH OWN-BOARD HYDRAULIC SYSTEM

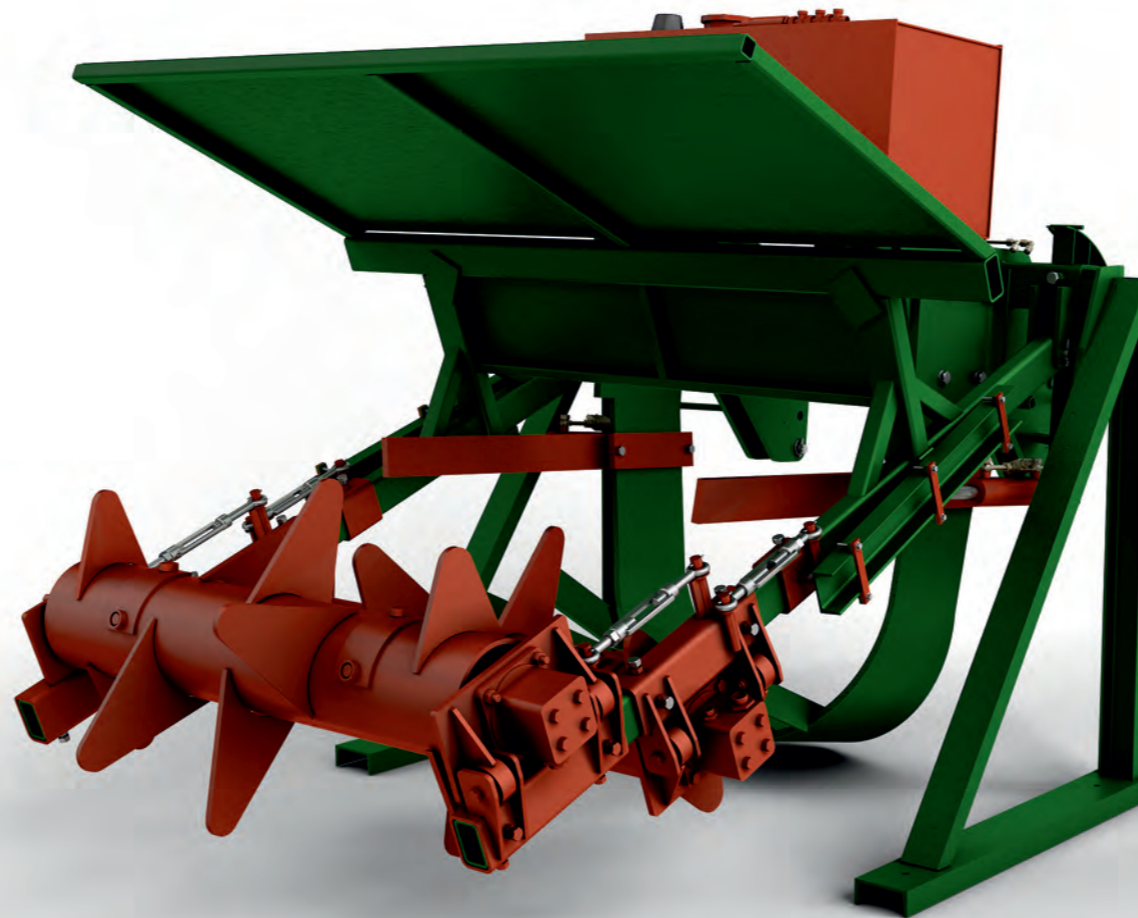

Technische Daten und Maßangaben sind annähernd und unverbindlich. Technische Änderungen vorbehalten.

Wagner breaker ploughs for requirement

Our breaker ploughs are suitable for fruit growing and Christmas tree cultures.

Model*
Tractor power
Weight
Share spacing
Working speed

M I AND M II
from 80 kW / 110 hp 4WD
appr. 1100 kg
appr. 90/100 cm
up to 10km/h

Model*
Tractor power
Weight
Share spacing
Working speed

G I AND GII
from 100 kW / 136 hp 4WD
appr. 1400 kg
appr. 120/130 cm
up to 10km/h

The share is wider. More lateral roots are removed.

Model
Tractor power
Weight
Share spacing
Working speed
cooling system is integrated

XL I AND XL II
from 132 kW / 180 hp 4WD
appr. 1920 kg
appr. 120/130 cm
up to 10km/h

Designed for tractors up to 310 hp / 228 kW (PTO output)

Model*
Tractor power
Weight
Share spacing
Working speed
cooling system is integrated

XXL I AND XXL II
from 206 kW / 280 hp 4WD
appr. 3214 kg
appr. 145/160 cm
up to 7km/h

Designed for tractors up to 360 hp with three-point hitch cat. III, PTO shaft drive 540 rpm, 1 double-acting hydraulic valve

* Christmas tree cultures

We develop and produce in-house – Knowhow from a single source.

THE MODELS M II AND G II ARE EQUIPPED WITH TWIN ROLLERS FOR THROWING OUT THE MATERIAL

DOUBLE TWIN ROLLER



The rolls interlock and clean themselves



ADVANTAGE
The emission rollers are as well available in double execution

WORKING DEPTH UP TO 60 CM

ALL MODELS ARE EQUIPPED WITH A SHARE IN ONE PIECE FOR WORKING WITHOUT CLOGGING