


BASECRETE + POOL SHELL AND POOL TILE WATERPROOFING SYSTEM GUIDE

GLASS POOL TILE – P602 TCNA Standard

1. **Primary Waterproofing** - Apply **Basecrete + Pool Shell Primary Waterproofing** (Penetrating Colloidal Silicate).
 - **BC-L0545** Basecrete Pool Shell Primary Waterproofing
2. Pressure wash and clean pool shell surface.
3. Apply approved **Mortar Bed Bond Coat** -Basecrete Bond Coat
4. Install approved **Mortar Bed**
5. **Secondary Waterproofing / Bond Coat** - Apply **Basecrete Secondary Waterproofing / Bond Coat** to a lightly dampened surface.
 - **BC-L0145** Part 1 of 2 – One (1) 5 gal. of liquid **and**
 - **BC-G0250** Part 2 of 2 – Three (3) 50 lbs. of Grey Compound **or/**
 - **BC-W0350** Part 2 of 2 – Three (3) 50 lbs. of White Compound **or/**
 - **BC-B0450** Part 2 of 2 – Three (3) 50 lbs. of Black Compound
6. Apply approved **Tile Bond Coat Adhesive**
7. Install tile
8. Install **Grout**

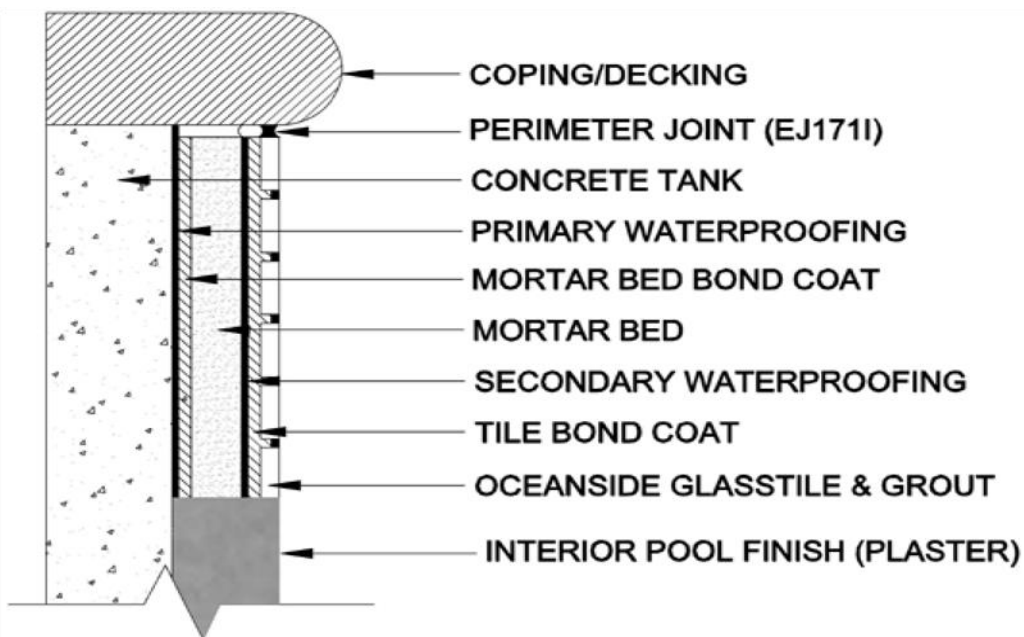

BASECRETE + POOL SHELL REMODEL AND NEW POOL SHELL CONSTRUCTION GUIDE

1. **Primary Waterproofing** - Apply **Basecrete + Pool Shell Primary Waterproofing** (Penetrating Colloidal Silicate).
 - **BC-L0545** Basecrete + Pool Shell Primary Waterproofing
2. Pressure wash and clean pool shell surface
3. Install high strength **Basecrete Reinforcing Mesh** over transition areas, joints, change of planes, cracks and fractures in pool shell using Basecrete Secondary Waterproofing.
 - **MH-04045** Basecrete 4" x 150' Reinforcing Mesh
 - **MH-09545** Basecrete 9.5" x 150' Reinforcing Mesh
 - **MH-12045** Basecrete 12" x 150' Reinforcing Mesh
 - **MH-38045** Basecrete 38" x 150' Reinforcing Mesh
4. **Secondary Waterproofing / Bond Coat** - Apply **Basecrete Secondary Waterproofing / Bond Coat** to a lightly dampened surface.
 - **BC-L0145** Part 1 of 2 – One (1) 5 gal. of liquid **and**
 - **BC-G0250** Part 2 of 2 – Three (3) 50 lbs. of Grey Compound **or/**
 - **BC-W0350** Part 2 of 2 – Three (3) 50 lbs. of White Compound **or/**
 - **BC-B0450** Part 2 of 2 – Three (3) 50 lbs. of Black Compound
5. Install **Plaster**

BASECRETE RECOMMENDED CURE TIMES

- Basecrete + Pool Shell Primary Waterproofing – 24 hours
- Basecrete Secondary Waterproofing / Bond Coat – 24 hours

Products may be purchased at your local Distributor.

BASECRETE PROUDLY SPONSORS GENESIS AND TRIBUTARY.

For technical questions please contact:

Vito Mariano: 941-879-4600

For general questions call or email us:

Home Office: 941-312-5142

Email: info@basecreteusa.com